


New Slim Generation of Routers RP-101

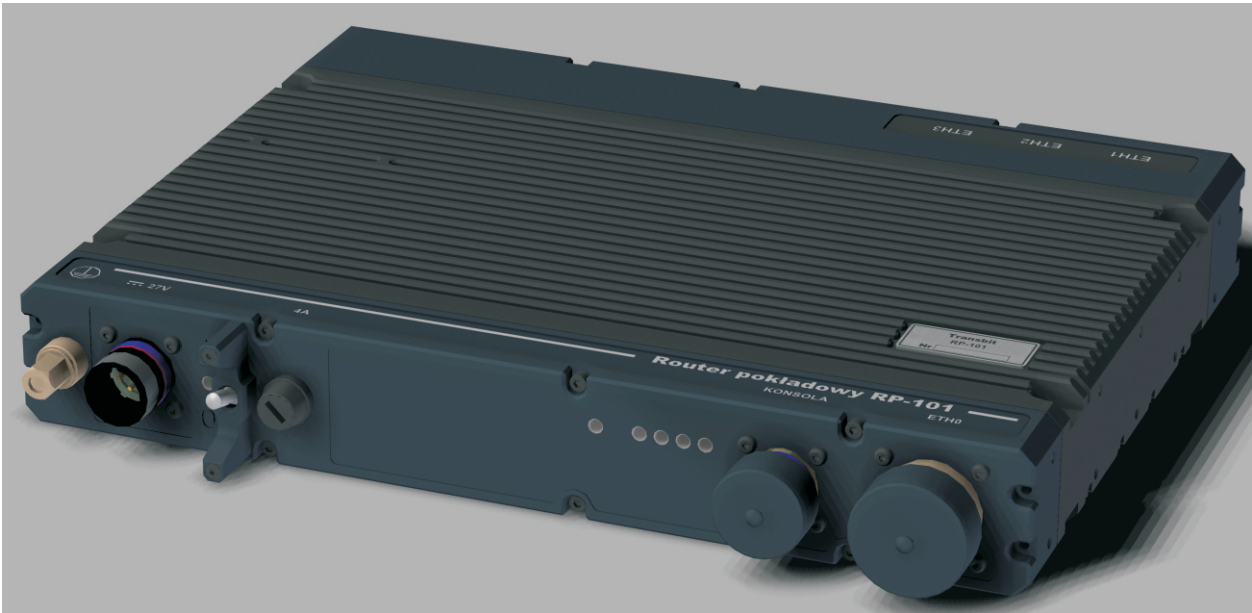

Key features

- Interfaces: 3 x Ethernet 100BASE-FX, 1 x Ethernet 10/100BASE-TX
- Full wire speed routing bandwidth
- Support multicast Dense Mode
- Routing protocols: RIPv2, OSPF, BGP
- QoS, Firewall, NAT
- Administration through: HTTP, SNMP, SSH, operator console and desktop
- Device dimension: width 330mm height 48mm depth 245mm
- Device weight: <5kg
- Supply: 27V
- Work temperature: from -30 °C up to +50 °C

CENZIN sp. z o.o.
81/83 Czerniakowska Street
00-957 Warsaw - POLAND

phone: +48 22 43 44 133
fax: +48 22 43 44 163
cenzin@cenzin.com.pl
www.cenzin.eu

New Slim Generation of Routers RP-110



Key features

- Interfaces: 5 x Ethernet 100BASE-FX, 1 x Ethernet 10/100BASE-TX, 4 x SHDSL, 2 x G703/STANAG 4210 (up to 2048Kbps), 3 x WAN fibre optic (up to 34 Mbps)
- Full wire speed routing bandwidth
- Support multicast Dense Mode
- Routing protocols: RIPv2, OSPF, BGP
- QoS, Firewall, NAT
- Administration through: HTTP, SNMP, SSH, operator console and desktop
- Device dimension: width 330mm height 48mm depth 245mm
- Device weight: <5kg
- Supply: 27V
- Work temperature: from -30 cC up to +50 cC